


### External Dimensions

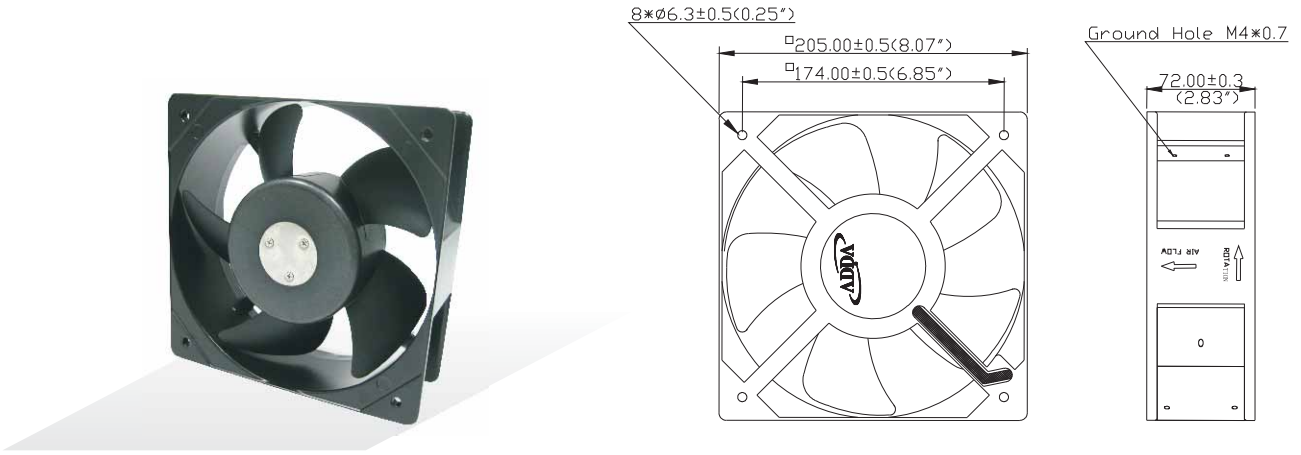

Frame:Aluminum Alloy  
 Impeller:Plastic(UL:94V-0)  
 Motor Structure:Capacitor-Run Induction Motor.  
 Motor Protection:Thermal Protect.  
 Lead wire:UL 1015AWG20  
 OPERATING TEMP\*:-10°C~70°C  
 \*:-10°C~60°C for fans with sleeve/ball combination bearings.

### Specifications(Nominal)


\*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ●=Hypro bearing


Frame size (mm)	Model No.	Bearing System Type	Volt. (VAC)	Freq. (Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
205x205x72	AK2071HB	◎	115	50/60	0.60/0.88	67.90/100.00	2800/3200	16.980/18.819	600.0/665.0	0.930/0.500	23.622/12.700	72.0/75.4	2100
	AK2072HB	◎	230	50/60	0.32/0.47	63.20/95.20							

Specifications subject to change without notice.



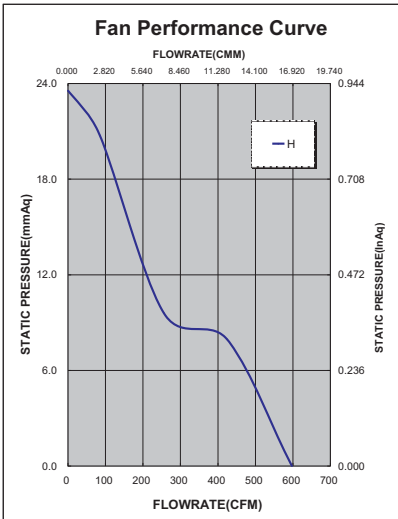


50Hz

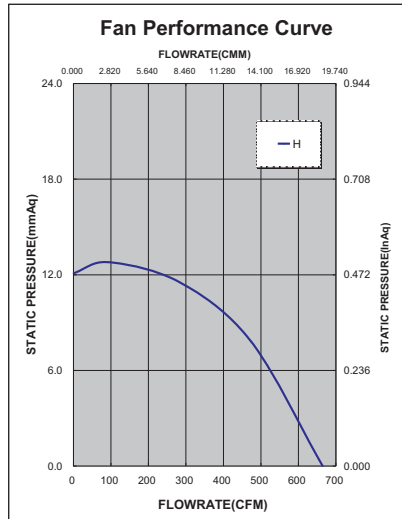

60Hz



\*Safety approvals

				
✓	✓		✓	✓